

KIA / HYUNDAI ESL

S.O.S Car Simulator instruction manual

ESL/ELV REPLACEMENT PROGRAM

Page	Content	MIN. VERSION	PHOTO	PINOUT	VIDEO
Page 2	• Program introduction				
Page 3	• KIA / HYUNDAI Old Type	001			
Page 4/5	• KIA / HYUNDAI New Type	120			





● Program introduction



Example cars

ESL

I30
IX35
Kona
Rio
Sorento

ESL

Sportage
Picanto
Tucson
Xceed
Ceed

ESL

Cerato
Elentra
I10
I20
Forte


ESL

Optima
Optima
Cadenza

● KIA / HYUNDAI Old Type

●●● Jumpers to solder

Choose the S.O.S program by soldering the following jumpers depending on your car brand:

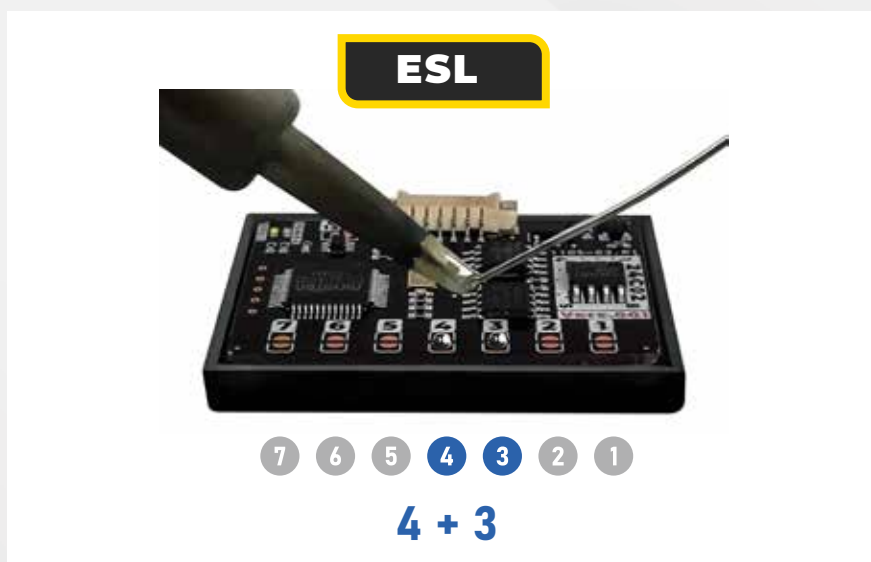

To select the program you need to solder the jumpers on the front of the Emulator:

Attention!

Always pul the Emulator back into the plastic cover before attaching it to the ECU board.

Attaching the Emulator to the ECU board without the plastic cover may result! in damaging the ECU or the Emulator!

● KIA / HYUNDAI Old Type



Program Usage

The Emulator can be used with Kia / Hyundai Old Type vehicles equipped with a 6-pin SCL plug



Example cars

KIA / HYUNDAI Old Type

I30	Sportage	Cerato	Optima
IX35	Picanto	Elentra	Optima
Kona	Tucson	I10	Cadenza
Rio	Xceed	I20	
Sorento	Ceed	Forte	



●●● Jumpers to solder

1

Select the S.O.S program by soldering the jumpers on the right:
4 + 3



7 6 5 4 3 2 1
4 + 3


2

Connect the Emulator to the SCL plug according to the pictures on the right.

3

The original ESL needs to be removed from the car.

GND	Pin 5
K-LINE	Pin 4
STATU	Pin 3
POWER +12V	Pin 1

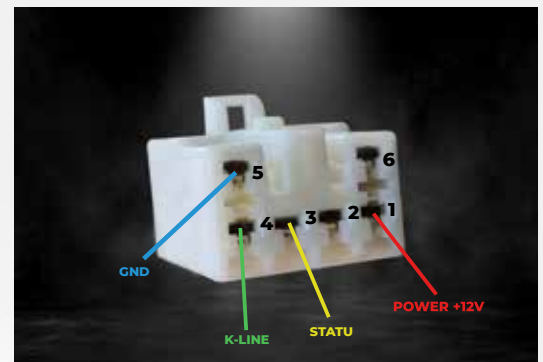

● Program introduction



Example cars

ESL



Hyundai Tucson
Hyundai Sonata
Hyundai Staria
Kia Sorento
Kia Sportage
Kia Karnaval



● KIA / HYUNDAI New Type

●●● Jumpers to solder

Choose the S.O.S program by soldering the following jumpers depending on your car brand:

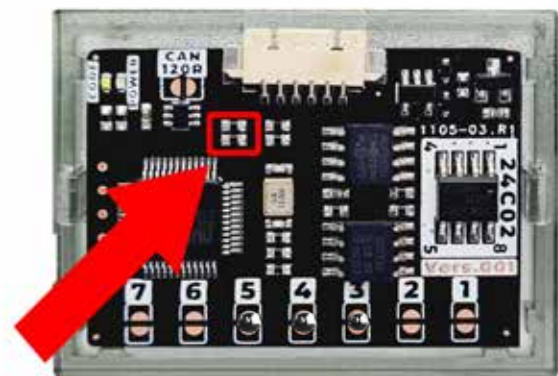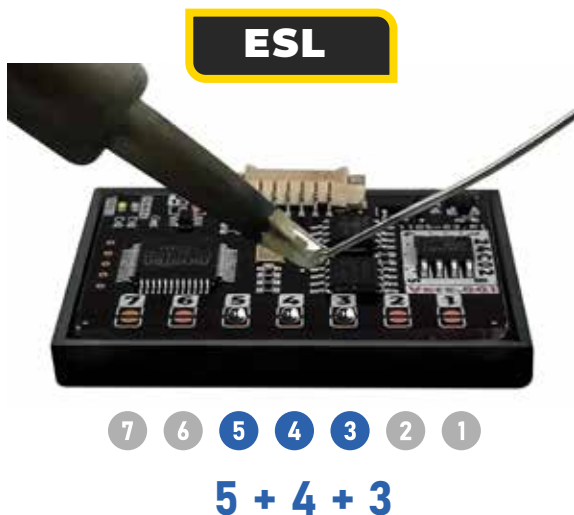

Please remove these two resistors when using the emulator on Hyundai new type steering lock.

To select the program you need to solder the jumpers on the front of the Emulator:

Attention!

Always pul the Emulator back into the plastic cover before attaching it to the ECU board.

Attaching the Emulator to the ECU board without the plastic cover may result! in damaging the ECU or the Emulator!

● KIA / HYUNDAI New Type



Program Usage

The Emulator can be used with Kia / Hyundai New Type vehicles equipped with a 6-pin SCL plug



Example cars

KIA / HYUNDAI New Type

Hyundai Tucson
Hyundai Sonata
Hyundai Staria

Kia Sorento
Kia Sportage
Kia Karnaval



●●● Jumpers to solder

1


- Select the S.O.S program by soldering the jumpers on the right:
5 + 4 + 3



1 6 5 4 3 2 1
5 + 4 + 3

2


- Please remove these two resistors when using the emulator on Hyundai / Kia for New Type Steering lock.

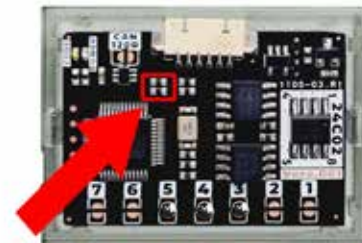

Please remove these two resistors when using the emulator on Hyundai new type steering lock.

3

- Connect the Emulator to the SCL plug according to the pictures on the right.

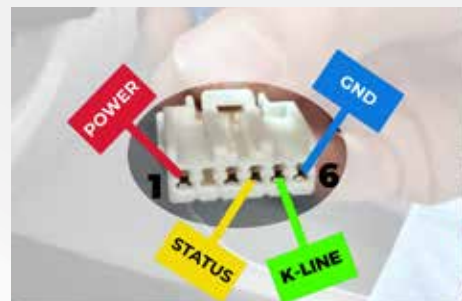

GND	Pin 6
K-LINE	Pin 5
STATU	Pin 4
POWER +12V	Pin 1

4

- The original ESL needs to be removed from the car.